


Operator Reference Sheet

KITCHENjet™ 1000 Inkjet Printer


**** Keep this Reference Sheet with Printer ****

Loading a New Paper Roll

- 1) Open the rear cover. Insert the new paper roll so that the paper unwinds from the bottom of the roll.
- 2) Pull leading edge of paper forward, making sure it is aligned to the line on the front cover and that it does not extend beyond the line.
- 3) Close the rear cover on the paper. The Insta-Load® feature will automatically complete the loading process.



Installing New Ink Cartridges

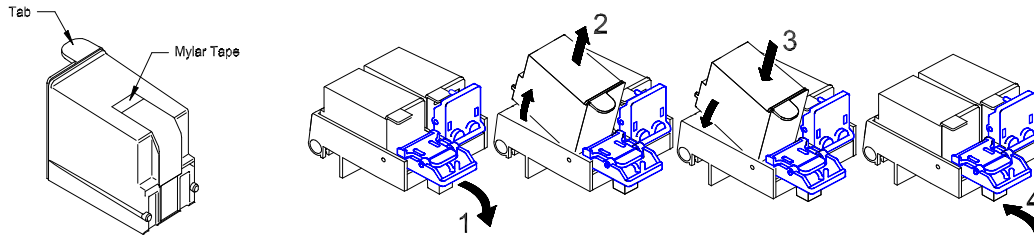

Do not touch the ink cartridge's metallic connector area with your fingers, this will result in cartridge contamination.

- 1) Open the front cover and pull down (release) the blue cartridge latch.
- 2) Take out old ink cartridge, making sure to note cartridge color and carriage position for replacement.
- 3) Remove new ink cartridge from sealed pouch. Hold cartridge by tab to avoid contamination. Remove Mylar tape. Place new ink cartridge into the carriage by holding the tab.
- 4) Close (engage) the blue latch and close both printer covers.
- 5) Always initialize the newly installed ink cartridges by pressing the **New Cartridge button** immediately after closing the printer covers. This will also re-set the ink level gauge to full.

Using Keypad Buttons

What Buttons do I use when...	Do this...
Turning the Printer ON/OFF	Press and release the Power button *
Removing the Ink Low Warning After Installing New Ink Cartridges	Press and release the New Cartridge button immediately after installing any new ink cartridge(s).
Cleaning the Ink Cartridges	Press and release the New Cartridge button . Repeat up to 3 times.
Printing the Ink Level Status	Press and release the New Cartridge button .
Feeding Paper	Press the Feed button

Helpful Hints

Always wait for the auto-cutter to complete its cut before removing the receipt.

Clear a paper jam by opening the covers, clearing the paper jam, removing any paper pieces, reverse feed paper by pressing the **Feed** and **New Cartridge buttons**, remove the paper roll and then load the paper roll as instructed above.

Where To Reach Us

TransAct Technologies, Inc.
Ithaca Facility
20 Bomax Drive
Ithaca, New York 14850
1.877.7ithaca (1.877.748.4222)
Fax: 607.257.3868
Monday through Friday, 8 a.m. to 5 p.m. est
www.ithacaprinters.com

TransAct Technologies, Ltd.
7 Wood View
Broomhouse Lane Industrial Estate
Edlington, Doncaster DN12 1EQ
United Kingdom
Phone: ++44 (0) 1709.772500
Fax: ++44 (0) 1709.772505
Monday through Friday 9 a.m. to 5 p.m. gmt

ithaca
a product of TRANSCAT
KITCHENjet™ 1000